


# C2050 Cyanoacrylate Adhesive

**Permabond C2050** is a flexible cyanoacrylate adhesive, exhibiting improved peel strengths when compared to other grades. C2050 is ideal for use on flexible or semi-porous surfaces. It can also be used to bond silicone when used in conjunction with Permabond Polyolefin Primer

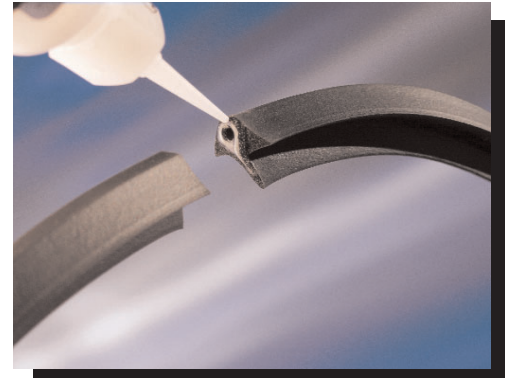

## C2050 is ideal for bonding flexible materials

- Single part room temperature curing
- Bonds well to plastics and rubbers
- Solvent free
- Ideal for flexible substrates
- No mixing required

**Summary:**  
**High viscosity**  
**High strength**  
**For plastics and rubber**

### PHYSICAL PROPERTIES

<b>Colour</b>	<b>Colourless</b>
<b>Viscosity</b>	<b>1500 mPa.s</b>
<b>Chemical Type</b>	<b>Ethyl Cyanoacrylate</b>
<b>Density</b>	<b>1.05</b>

### TYPICAL PROPERTIES

<b>Handling Time</b>	<b>~7 seconds</b>
<b>Full Strength</b>	<b>24 hours</b>
<b>Tensile Strength</b>	<b>18 MPa</b>
<b>Temperature Range</b>	<b>-30 to +85°C</b>
<b>Maximum Gap Fill</b>	<b>0.2 mm</b>

*This is a typical cure speed to be expected on most rubber and plastic surfaces. The handling times can be affected by temperature, humidity and specific surfaces being bonded. Larger gaps or acidic surfaces will also reduce cure speed but this can be overcome by the use of Permabond C Surface Conditioner (CSA).*

## TEMPERATURE RESISTANCE

Thermal resistance is excellent between -30 and 85°C. Heating causes the adhesive to soften but strength is regained on cooling, provided 85°C is not exceeded for prolonged periods.

### Storage and Handling

When stored in the original unopened containers at 5-7°C, the shelf life of this product is 12 months from the date of despatch from Permabond.

Please also read the Material Safety Data Sheet. Users are reminded that all materials, whether innocuous or not, should be handled according to the principles of good industrial hygiene.

### Directions for use:

- Surfaces should be clean, dry and grease free prior to bonding. Abrading and degreasing the surface will give a much stronger bond. (MEK or similar solvent can be used to degrease surfaces.)
- Apply the adhesive sparingly to one surface (usually 1 drop is sufficient) bring the components together quickly and correctly aligned.
- Apply sufficient pressure to ensure the adhesive spreads into a thin film.
- Do not disturb or re-align until curing is achieved, normally in a few seconds.
- Any surplus adhesive can be removed with MEK (or similar solvent).
- For difficult or porous surfaces try using Permabond CSA activator. When bonding polypropylene, polyethylene, PTFE or silicone, we would recommend priming first with Permabond Polyolefin Primer

### Other Products in the Permabond Range...

#### Cyanoacrylate adhesives...

General purpose  
Low bloom / Low odour  
High temperature resistance  
Metal bonding  
Flexible  
Toughened



We also have a new polyolefin primer for pre-treating polypropylene, polyethylene, PTFE. For use with cyanoacrylate adhesive.



#### Anaerobic adhesives...

Threadlocking  
Pipe-sealing  
Retaining  
High temperature resistance  
Toughened  
Variety of viscosities and strengths available

**If you require help with an application, please contact the Permabond team for technical advice on surface preparation, joint design, adhesive selection and how to optimise your production process.**

The information given and the recommendations made herein are based on our experience and are believed to be accurate. No guarantee as to, or responsibility for, their accuracy can be given or accepted, however, and no statement herein is to be treated as a representation or warranty. In every case we urge and recommend that purchasers, before using any product, make their own tests to determine, to their own satisfaction, its suitability for their particular purposes under their own operating conditions.

UK Customer Service: 0800 975 9700  
Germany: 0800 10 13 177

UK Helpline: 0800 975 9800  
France: 0805 11 13 88

Tel. +44(0)2380 611400  
Fax. +44(0)2380 611700

**Permabond**<sup>®</sup>  
Engineering Adhesives

**Permabond Engineering Adhesives Ltd, Wessex House,  
Upper Market Street, Eastleigh, SO50 9FD**

Permabond C2050